


PICTURE



MEASUREMENTS

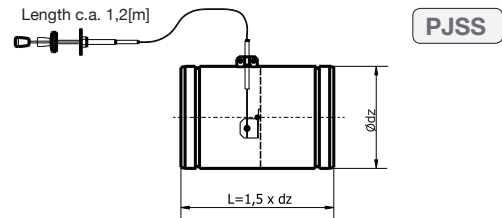

„spiro” diameter	Ø80	Ø100	Ø110	Ø115	Ø120	Ø125	Ø130	Ø140	Ø150	Ø160	Ø180	Ø200
dz	78	98	108	113	118	123	128	138	148	158	178	198
Weight [kg]	0.18	0.26	0.29	0.30	0.33	0.35	0.38	0.45	0.50	0.58	0.70	0.85

DENOTATIONS/PRODUCT CODES

- 400026 Friskluftspjeld med fleksibel vaier Ø 80 mm
 400225 Friskluftspjeld med fleksibel vaier Ø100 mm
 400028 Friskluftspjeld med fleksibel vaier Ø125 mm
 *Flere dimensjoner leveres på bestilling.

MATERIALS

Destination	W	W- ventilation
	O	O- air heating
PJSS/...RUBBER	W	max. working temp. - 60°C
	O	
PJSS/...SILICONE	W	max. working temp. - 150°C
	O	
Material	OC	OC - galvanised steel sheet

Gummipakning på vaier,
maks. temp. 60°C

Silikonpakning på spjeld,
maks. temp. 150°C